


# P7500I

Compact & Solid



## FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Compact and Solid Canopy
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box

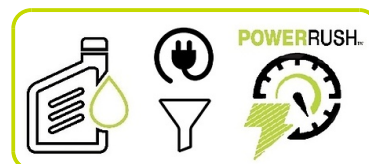

## POWERRUSH

MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS. Powerrush increases electrical current upon demand, above rated output when starting electric motors.

## PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	7000
Rated Power	Watts	6500



## Engine


Engine Brand		Pramac
Type		OHV
Exhaust emission level		Stage V
Operating Speed Nominal	rpm	Variable
Fuel		Petrol
Starting Systems		Electric (+Recoil)
Oil capacity	l	1.45
Low Oil Shutdown		√

## Alternator

Voltage regulation system		Inverter
---------------------------	--	----------


## Dimensional data

Length	(L) mm	950
Width	(W) mm	765
Height	(H) mm	773
Dry weight	kg	146
Carton box dimension LxWxH	mm	1010x660x742

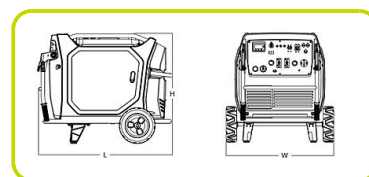

## Autonomy

Fuel tank capacity		25
Fuel consumption 75%	l/h	2.25
Running time 75%	h	11

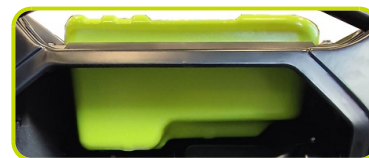

## Noise level

Guaranteed noise level (LWA)	dB(A)	92
Noise pressure level @ 7 m	dB(A)	64

## GENSET CONTROL

### COMMANDS / INSTRUMENTATION

- Selector switch: O/I | Power Button
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- Outputting energy (light - Green)
- Overloading and Oil alarming (light - Red)
- Voltmeter / Hourmeter / Frequency meter / Fuel Gauge
- Parallel kit receptacles

### PROTECTIONS

- Over-load, Oil Guard, Short Circuit, High temperature, Over-speed protections
- Protection Control panel IP 44

### OUTPUT:

- n°2 USB DC 5V 2A

### SOCKET TYPE

SCHUKO 230V 16A IP44	2
2P+T CEE 230V 32A IP44	1



The information is aligned with the Data file at the time of download. Printed on 20/07/2023 (ID 19635)

©2023 | PR Industrial S.r.l unipersonale – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

