

# OFF GRID LX 60/125 LI



## FEATURES:

- Deep cycle automotive NMC Li-Ion battery
- Advanced EMS with touch screen control
- GSM Remote monitoring
- Full system DC isolator with pre-charge
- Auto Full system bypass
- Single to three phase conversion



## Output specifications

Output power (Continuous)	kVA	60
Output power peak (5s)	kW	120
Voltage	V	400/230
Frequency	Hz	50
Phases		3



## Battery specifications

Battery (Type)		Li-Ion NMC
Battery Nominal DC Voltage	V	55.5
Battery design life (to 80% DoD)	cycles	3000
Battery Nominal capacity (sizes)	kWh	125
Usable energy AC side (@80% DoD)	kWh	100



## General Description

Off Grid LX is a universal Battery Energy Storage system (BES) ideally suited to a range of applications, delivering reliable power in the most cost effective and environmentally sensitive way. Energy stored within the unit is converted electronically into mains power. Power can be derived from integrated solar PV, connection to an external grid supply or from a diesel generator or wind turbine. Energy is automatically managed from any or all of these energy sources to ensure the most efficient, lowest maintenance and best environmental impact is achieved. Remote communication ensures real time monitoring and maintenance can be effected from any location in the world.



### Input specifications



Maximum input Three Phases socket 400V	A	125
Maximum input Single Phase socket 230V	A	125
System pass-through capacity	A	200

### Installation data

Length	(L) mm	2012
Width	(W) mm	1183
Height	(H) mm	2012
Weight	kg	2024
Protection rating	IP	34
Operating temperature range (charging suspended below 0°C)	°C	-10...45

### Instruments, controls & connections

Inverter protection Short Circuit	✓
Inverter protection Overload	✓
Inverter protection Over Temperature	✓
Inverter protection Low Battery	✓
System status control panel	✓
Battery condition	✓
Battery main isolator	✓
GSM Remote monitoring	✓
Automatic generator auto-start signal	✓
Input 125A 400/230V IEC 60309 3ph	2
Input connection	IEC 60309 or hardwire stud
Output Protection RCBO / RCD	✓
Output 32A 230V IEC 60309 1ph	1
Output 32A 400/230v IEC 60309 3ph	2
Output 63A 400/230v IEC 60309 3ph	1
Output 125A 400/230v IEC 60309 3ph	1
Output connection AC	400V 3Phase IEC 60309 or hardwire stud

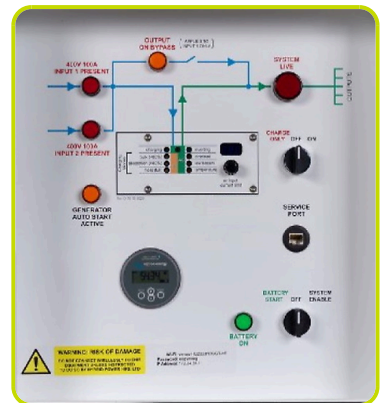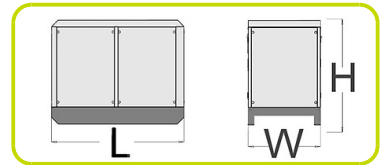

### BATTERY STORAGE DEPLOYED WITH GENERATOR TO SUPPLY SITE WELFARE UNIT



### Optional features

Solar PV charge controller	MPPT
EV Charge Point	EVC
Custom sockets distribution	CS
Custom colors	DCCX

